



Jetflow HIT

Product Brochure

t: 01384 275800
f: 01384 275810
e: bs@eltafans.co.uk
visit: eltaselect.com

Jetflow HIT

Centrifugal In-line Fan

centrifugal



OVERVIEW

The Jetflow HIT range of all metal in-line centrifugal fans are ideally suited to a wide range of residential, commercial and industrial supply or extract applications. The Jetflow offers three speed motors as standard to meet your system requirements and provide the ideal solution for high performance requirements in low airflow, medium pressure systems.

MORE INFORMATION

AC

PAGE NO.

Performance, SFP & Electrical Data	3
Sound Data	5
Accessories & Wiring Data	7
Optimum Energy Efficiency Point	7
Dimensional Data	8

QUICK FACTS

- ✓ 7 standard sizes from 100mm to 315mm.
- ✓ Air volume flow rates up to 0.51 m³/s.
- ✓ Static pressures up to 650 Pa.
- ✓ Suitable for operating temperatures up to +50°C.
- ✓ Extensive stock range available.

CASING

HIT casings have a galvanised pressed sheet steel construction, providing a robust, long lasting and corrosion resistant casing.

The inlet and outlet spigots should be a minimum of 25mm long to enable the installation and fixing to circular rigid, or flexible ductwork. All HIT units are to be supplied complete with integral mounting brackets manufactured from galvanised sheet steel for horizontal or vertical mounting arrangements.

IMPELLER

All impellers are single inlet backward curved centrifugal type. Impellers are balanced to ISO 14694 Grade G6.3.

MOTORS

All motors are to be highly efficient, three speed external rotor motors; matched to the aerodynamic performance of the impeller.

Motors have sealed for life ball bearings to enable the fan to be mounted at any angle.

Motors are protected to IP44 with Class F insulation; suitable for speed control and ambient operating temperatures up to +50°C with built in thermal overload protection. Non self-resetting thermal cut-outs are fitted in accordance with EN60335-2-80.

Motors are wound for 230V/1Ph/50Hz/60Hz supply. Electrical connections are made by an IP54 terminal box fitted to the outside of the fan casing.

QUALITY MANAGEMENT

Units are to be designed and manufactured with procedures as defined in BS EN ISO 9001:2008. All HIT units are to be tested to ISO 5801:2007 (airside performance) and BS 848 Part 2:1985 (sound performance).

TYPICAL APPLICATIONS

Variety of industrial, light commercial & domestic applications, including:

- Toilets
- Café
- Entrance Halls
- Duct Ventilation Boost
- Bathrooms
- Equipment Cooling
- Air Curtain Supply
- Restaurants



Eita Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Jetflow HIT



Performance, SFP & Electrical Data

SINGLE Phase - 220V to 240V / 50Hz

Product Code	Speed r/min	Airflow SFP	Airflow m³/s @ Static Pressure Pa.											Overall Efficiency %	FMEG	Motor Electrical Data			dBA @ 3m		
			0	50	100	150	200	250	300	350	400	450	500			FLC Amps	SC Amps	Input kW			
HIT100	HIGH	2720	m³ / s	0.061	0.055	0.049	0.043	0.036	0.027	0.015	0.002				14.2	-	0.26	0.92	0.061	Inlet	46
			W / (L/s)	0.98	1.07	1.18	1.31	1.51	1.91	3.19	22.03									Outlet	46
	MED	2570	m³ / s	0.053	0.047	0.041	0.035	0.029	0.020	0.011					14.4		0.24	0.83	0.051	Inlet	44
			W / (L/s)	0.95	1.04	1.15	1.27	1.45	1.88	2.90				Outlet						44	
	LOW	2430	m³ / s	0.043	0.038	0.033	0.028	0.022	0.013	0.007					12.0		0.23	0.82	0.052	Inlet	42
			W / (L/s)	1.17	1.27	1.39	1.51	1.71	2.54	3.99				Outlet						42	
Breakout																			Inlet	37	
																			Outlet	37	
HIT125	HIGH	2690	m³ / s	0.095	0.083	0.068	0.056	0.044	0.031	0.013					16.2	-	0.29	1.00	0.066	Inlet	47
			W / (L/s)	0.69	0.78	0.92	1.07	1.28	1.69	3.73				Outlet						49	
	MED	2550	m³ / s	0.077	0.066	0.053	0.043	0.033	0.021	0.005					15.3		0.26	0.90	0.057	Inlet	44
			W / (L/s)	0.69	0.83	0.96	1.11	1.31	1.80	3.71				Outlet						46	
	LOW	2410	m³ / s	0.059	0.047	0.037	0.030	0.024	0.013						12.2		0.25	0.87	0.056	Inlet	38
			W / (L/s)	0.94	1.13	1.29	1.44	1.67	2.55				Outlet	42							
Breakout																			Inlet	36	
																			Outlet	36	
HIT150	HIGH	2590	m³ / s	0.130	0.120	0.108	0.094	0.078	0.060	0.039	0.001				15.9	-	0.28	0.99	0.065	Inlet	47
			W / (L/s)	0.48	0.53	0.60	0.69	0.81	1.01	1.46	44.46			Outlet						49	
	MED	2320	m³ / s	0.112	0.101	0.081	0.065	0.051	0.036	0.015					20.7		0.26	0.90	0.057	Inlet	44
			W / (L/s)	0.46	0.54	0.68	0.83	1.00	1.29	2.46				Outlet						45	
	LOW	2180	m³ / s	0.090	0.065	0.049	0.038	0.029	0.017						13.1		0.25	0.86	0.055	Inlet	38
			W / (L/s)	0.57	0.85	1.08	1.27	1.54	2.18				Outlet	39							
Breakout																			Inlet	35	
																			Outlet	35	
HIT160	HIGH	2500	m³ / s	0.129	0.117	0.104	0.090	0.075	0.058	0.034	0.006				25.0	-	0.28	0.98	0.064	Inlet	47
			W / (L/s)	0.47	0.53	0.60	0.70	0.84	1.06	1.69	7.78			Outlet						49	
	MED	2170	m³ / s	0.110	0.097	0.081	0.064	0.047	0.028	0.009					20.2		0.24	0.84	0.052	Inlet	44
			W / (L/s)	0.43	0.52	0.64	0.79	1.02	1.54	3.70				Outlet						45	
	LOW	2030	m³ / s	0.098	0.082	0.062	0.046	0.031	0.016	0.005					15.1		0.23	0.81	0.050	Inlet	38
			W / (L/s)	0.47	0.59	0.79	1.02	1.37	2.18	5.21				Outlet						39	
Breakout																			Inlet	35	
																			Outlet	35	
HIT200	HIGH	2520	m³ / s	0.254	0.240	0.225	0.207	0.187	0.165	0.139	0.109	0.075	0.038		28.1	N46	0.71	2.49	0.159	Inlet	51
			W / (L/s)	0.56	0.61	0.67	0.75	0.84	0.96	1.12	1.37	1.86	3.29							Outlet	53
	MED	2315	m³ / s	0.220	0.197	0.165	0.134	0.109	0.089	0.071	0.054				18.4		0.61	2.13	0.138	Inlet	47
			W / (L/s)	0.54	0.64	0.81	1.03	1.24	1.43	1.65	1.96			Outlet						48	
	LOW	1420	m³ / s	0.189	0.109	0.073	0.064	0.059							5.7		0.59	2.07	0.135	Inlet	42
			W / (L/s)	0.64	1.22	1.79	1.92	1.99						Outlet						41	
Breakout																			Inlet	36	
																			Outlet	36	

Overall total efficiency, r/min and FMEG values are per ISO 12759 installation category D. FLC Amps @ 230V / 1Ph / 50Hz.

Data provided at standard air density of 1.2 kg/m³.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only.

Eita Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Jetflow HIT



Performance, SFP & Electrical Data

SINGLE Phase - 220V to 240V / 50Hz

Product Code	Speed r/min	Airflow SFP	Airflow m³/s @ Static Pressure Pa.											Overall Efficiency %	FMEG	Motor Electrical Data			dBA @ 3m		
			0	50	100	150	200	250	300	350	400	450	500			FLC Amps	SC Amps	Input kW			
HIT250	HIGH	2400	m³ / s	0.269	0.254	0.236	0.216	0.194	0.170	0.144	0.116	0.089	0.061	0.035	24.7	N43	0.79	2.75	0.182	Inlet	52
			W / (L/s)	0.58	0.63	0.70	0.79	0.92	1.06	1.24	1.45	1.76	2.30	3.56						Outlet	56
	MED	2290	m³ / s	0.229	0.213	0.182	0.130	0.103	0.086	0.072	0.059	0.046			15.3		0.73	2.55	0.167	Inlet	49
			W / (L/s)	0.64	0.72	0.89	1.26	1.54	1.78	2.01	2.29	2.71								Outlet	52
	LOW	1380	m³ / s	0.194	0.146	0.075	0.064	0.055	0.048	0.041	0.033				5.5		0.68	2.38	0.156	Inlet	44
			W / (L/s)	0.74	1.04	1.95	2.23	2.47	2.71	3.01	3.47									Outlet	47
Breakout																			Inlet	40	
																			Outlet	40	
HIT250B	HIGH	2390	m³ / s	0.311	0.290	0.268	0.241	0.208	0.173	0.141	0.115	0.090	0.066	0.040	25.2	N43	0.79	2.75	0.182	Inlet	52
			W / (L/s)	0.51	0.57	0.63	0.73	0.87	1.04	1.22	1.41	1.65	2.04	3.00						Outlet	56
	MED	2300	m³ / s	0.241	0.205	0.144	0.111	0.093	0.078	0.066	0.054	0.043	0.030		16.1		0.66	2.30	0.150	Inlet	47
			W / (L/s)	0.59	0.71	1.04	1.31	1.52	1.71	1.92	2.18	2.56	3.29								Outlet
	LOW	2090	m³ / s	0.190	0.128	0.077	0.061	0.051	0.043	0.035	0.028	0.021			9.8		0.59	2.06	0.134	Inlet	41
			W / (L/s)	0.69	1.04	1.68	2.03	2.33	2.66	3.06	3.61	4.52								Outlet	42
Breakout																			Inlet	36	
																			Outlet	36	
HIT315	HIGH	2270	m³ / s	0.312	0.291	0.262	0.227	0.191	0.158	0.128	0.099	0.071	0.045	0.021	22.2	N40	0.80	2.79	0.184	Inlet	56
			W / (L/s)	0.50	0.56	0.66	0.79	0.95	1.14	1.37	1.67	2.14	3.07	5.80						Outlet	56
	MED	2010	m³ / s	0.260	0.214	0.148	0.113	0.090	0.072	0.056	0.041	0.027			13.0		0.69	2.41	0.152	Inlet	51
			W / (L/s)	0.53	0.67	1.02	1.32	1.60	1.93	2.34	2.96	4.11								Outlet	51
	LOW	1840	m³ / s	0.217	0.134	0.073	0.051	0.038	0.029						6.8		0.59	2.07	0.136	Inlet	46
			W / (L/s)	0.59	1.01	1.78	2.40	2.99	3.66											Outlet	47
Breakout																			Inlet	36	
																			Outlet	36	
HIT315B	HIGH	2230	m³ / s	0.517	0.489	0.457	0.417	0.369	0.313	0.261	0.219	0.183	0.152	0.124	29.5	N45	1.19	4.18	0.275	Inlet	56
			W / (L/s)	0.44	0.49	0.55	0.62	0.73	0.88	1.04	1.20	1.38	1.58	1.83						Outlet	58
	MED	2250	m³ / s	0.485	0.449	0.399	0.331	0.267	0.222	0.187	0.157	0.130			24.5		1.10	3.86	0.251	Inlet	54
			W / (L/s)	0.44	0.49	0.58	0.75	0.94	1.11	1.27	1.44	1.64								Outlet	56
	LOW	2140	m³ / s	0.449	0.412	0.344	0.247	0.200	0.167	0.140	0.115	0.090			20.1		1.04	3.65	0.236	Inlet	52
			W / (L/s)	0.46	0.52	0.66	0.95	1.15	1.33	1.52	1.75	2.07								Outlet	54
Breakout																			Inlet	49	
																			Outlet	49	

Overall total efficiency, r/min and FMEG values are per ISO 12759 installation category D. FLC Amps @ 230V / 1Ph / 50Hz.

Data provided at standard air density of 1.2 kg/m³.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only.

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Jetflow HIT

Sound Data



SINGLE Phase - 220V to 240V / 50Hz

Product Code		Sound Power Level dBW @ Octave Band Hz								Total dB	Silencer dBA Attenuation				
		63Hz	125Hz	250Hz	500Hz	1 kHz	2 kHz	4 kHz	8 kHz		300	600	900	1200	
HIT100	HIGH	Inlet	57	60	67	63	63	59	52	47	71	-16	-23	-29	-31
		Outlet	61	62	64	61	63	58	53	47	70	-17	-23	-29	-31
		Breakout	69	59	58	57	57	49	44	39	70	-	-	-	-
	MED	Inlet	54	58	64	61	61	57	50	45	68	-16	-23	-29	-31
		Outlet	59	61	62	59	61	57	51	45	68	-17	-23	-29	-31
		Breakout	57	57	57	55	55	48	44	40	63	-	-	-	-
	LOW	Inlet	56	56	62	59	59	54	47	42	66	-16	-23	-29	-31
		Outlet	59	59	60	57	60	55	49	42	67	-17	-24	-29	-31
		Breakout	55	56	56	55	54	46	42	34	62	-	-	-	-
HIT125	HIGH	Inlet	60	60	66	63	63	60	55	48	71	-16	-22	-27	-30
		Outlet	61	62	66	66	66	62	57	50	72	-17	-24	-28	-31
		Breakout	57	58	59	62	60	53	45	37	67	-	-	-	-
	MED	Inlet	57	58	63	60	60	57	51	43	68	-15	-22	-27	-30
		Outlet	61	59	63	63	63	59	53	45	70	-17	-24	-28	-31
		Breakout	56	56	58	59	57	50	42	33	65	-	-	-	-
	LOW	Inlet	56	54	57	55	54	51	46	43	63	-15	-21	-26	-29
		Outlet	59	56	59	59	59	54	47	38	66	-16	-23	-28	-31
		Breakout	55	53	54	56	53	46	38	30	61	-	-	-	-
HIT150	HIGH	Inlet	60	60	66	63	63	60	55	48	71	-14	-21	-24	-27
		Outlet	61	62	68	65	66	61	55	48	73	-14	-21	-24	-27
		Breakout	59	61	62	62	59	53	48	36	68	-	-	-	-
	MED	Inlet	57	58	63	60	60	57	51	43	68	-14	-20	-24	-26
		Outlet	58	60	64	62	62	56	49	41	69	-14	-20	-24	-26
		Breakout	57	58	59	59	56	48	37	28	65	-	-	-	-
	LOW	Inlet	56	54	57	55	54	51	46	43	63	-14	-20	-23	-26
		Outlet	55	57	58	56	56	50	40	32	64	-13	-19	-23	-26
		Breakout	55	54	55	54	51	44	36	28	61	-	-	-	-
HIT160	HIGH	Inlet	60	60	66	63	63	60	55	48	71	-14	-20	-24	-27
		Outlet	61	62	68	65	66	61	55	48	73	-14	-21	-24	-27
		Breakout	59	61	62	62	59	53	48	36	68	-	-	-	-
	MED	Inlet	57	58	63	60	60	57	51	43	68	-14	-20	-24	-27
		Outlet	58	60	64	62	62	56	49	41	69	-14	-20	-24	-27
		Breakout	57	58	59	59	56	48	37	28	65	-	-	-	-
	LOW	Inlet	56	54	57	55	54	51	46	43	63	-14	-20	-23	-26
		Outlet	55	57	58	56	56	50	40	32	64	-13	-19	-22	-26
		Breakout	55	54	55	54	51	44	36	28	61	-	-	-	-
HIT200	HIGH	Inlet	59	64	69	67	67	66	60	55	74	-14	-19	-24	-26
		Outlet	64	66	73	70	68	66	60	54	77	-13	-18	-22	-25
		Breakout	60	64	69	65	62	59	52	40	72	-	-	-	-
	MED	Inlet	57	66	66	63	63	61	55	48	71	-13	-18	-22	-25
		Outlet	59	64	71	65	63	61	54	45	74	-11	-16	-20	-23
		Breakout	59	63	65	61	58	54	44	32	69	-	-	-	-
	LOW	Inlet	56	61	63	58	58	56	46	37	67	-12	-17	-21	-24
		Outlet	55	60	60	59	57	53	44	33	66	-12	-17	-22	-25
		Breakout	57	60	56	55	52	46	33	26	64	-	-	-	-

Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure. The Sound Power Level Spectra are in dB re-1pW.

Eita Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Jetflow HIT

Sound Data



SINGLE Phase - 220V to 240V / 50Hz

Product Code		Sound Power Level dBW @ Octave Band Hz								Total dB	Silencer dBA Attenuation				
		63Hz	125Hz	250Hz	500Hz	1 kHz	2 kHz	4 kHz	8 kHz		300	600	900	1200	
HIT250	HIGH	Inlet	64	65	70	70	68	65	62	58	76	-13	-18	-21	-24
		Outlet	65	69	72	74	73	69	64	57	79	-13	-19	-22	-26
		Breakout	64	67	65	69	66	61	52	41	74	-	-	-	-
	MED	Inlet	63	64	67	66	65	61	59	53	73	-13	-18	-20	-24
		Outlet	63	69	69	71	68	65	59	52	76	-13	-18	-21	-25
		Breakout	62	67	62	65	61	56	46	34	71	-	-	-	-
	LOW	Inlet	62	66	64	62	60	56	55	42	71	-11	-16	-18	-21
		Outlet	60	71	66	65	62	59	52	41	74	-11	-15	-17	-20
		Breakout	59	69	58	60	54	50	41	37	70	-	-	-	-
HIT250B	HIGH	Inlet	65	64	65	68	68	65	63	55	74	-15	-20	-23	-27
		Outlet	66	68	71	77	71	68	63	56	80	-12	-18	-22	-26
		Breakout	62	65	62	67	63	58	49	37	71	-	-	-	-
	MED	Inlet	60	68	62	63	63	61	55	43	72	-13	-18	-20	-23
		Outlet	63	66	72	68	64	62	54	44	75	-11	-16	-18	-25
		Breakout	59	70	60	60	56	52	40	28	71	-	-	-	-
	LOW	Inlet	59	61	58	57	58	55	45	35	66	-13	-18	-20	-23
		Outlet	58	60	63	60	58	56	45	36	68	-12	-17	-19	-22
		Breakout	55	65	54	54	51	46	32	27	66	-	-	-	-
HIT315	HIGH	Inlet	69	67	67	74	72	66	66	63	78	-13	-16	-19	-22
		Outlet	69	67	71	75	71	70	65	62	79	-13	-16	-19	-22
		Breakout	64	67	61	68	65	59	50	41	73	-	-	-	-
	MED	Inlet	65	63	64	68	67	63	61	58	74	-13	-17	-20	-22
		Outlet	65	66	68	70	66	65	61	57	75	-13	-16	-19	-21
		Breakout	60	62	62	60	57	52	43	36	68	-	-	-	-
	LOW	Inlet	63	62	64	61	63	60	57	48	70	-13	-16	-19	-21
		Outlet	62	62	68	64	61	61	57	51	72	-12	-14	-17	-20
		Breakout	57	60	57	54	53	47	40	27	64	-	-	-	-
HIT315B	HIGH	Inlet	69	70	68	74	71	69	65	65	79	-13	-17	-20	-22
		Outlet	73	71	71	74	73	73	67	67	81	-13	-17	-20	-22
		Breakout	68	73	62	64	61	58	48	41	75	-	-	-	-
	MED	Inlet	68	76	67	71	69	67	64	64	79	-12	-15	-17	-19
		Outlet	70	74	70	72	71	71	65	66	80	-13	-16	-19	-21
		Breakout	66	75	62	66	63	60	50	43	76	-	-	-	-
	LOW	Inlet	67	75	66	68	67	66	61	62	78	-12	-15	-17	-19
		Outlet	70	74	69	70	68	69	63	64	79	-12	-16	-18	-20
		Breakout	66	72	63	68	66	62	53	45	75	-	-	-	-

Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure. The Sound Power Level Spectra are in dB re-1pW.

Eltas Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Jetflow HIT

Accessories & Wiring Data



For more information on Accessories & Wiring Diagrams, please see individual product downloads, or visit eltaselect.com/information-centre

SINGLE Phase - 220V to 240V / 50Hz

Product Code	3 Speed Controller	Electronic Controller	Flexible Connections (each)	Clamps (each)	Damper	Panel Filter	Electric Heater Battery
HIT100	149-3SP-C	149-HCF1.7	018-0100-FLEX	018-100-CLAMP	018-100-DAMPER	018-0100-FILT-P	018-0100-HEAT-1
HIT125	149-3SP-C	149-HCF1.7	018-0125-FLEX	018-125-CLAMP	018-125-DAMPER	018-0125-FILT-P	018-0125-HEAT-1
HIT150	149-3SP-C	149-HCF1.7	018-0150-FLEX	018-150-CLAMP	018-150-DAMPER	018-0150-FILT-P	018-0150-HEAT-1
HIT160	149-3SP-C	149-HCF1.7	018-0160-FLEX	018-160-CLAMP	018-160-DAMPER	018-0160-FILT-P	018-0160-HEAT-1
HIT200	149-3SP-C	149-HCF1.7	018-0200-FLEX	018-200-CLAMP	018-200-DAMPER	018-0200-FILT-P	018-0200-HEAT-1
HIT250	149-3SP-C	149-HCF1.7	018-0250-FLEX	018-250-CLAMP	018-250-DAMPER	018-0250-FILT-P	018-0250-HEAT-1
HIT250B	149-3SP-C	149-HCF1.7	018-0250-FLEX	018-250-CLAMP	018-250-DAMPER	018-0250-FILT-P	018-0250-HEAT-1
HIT315	149-3SP-C	149-HCF1.7	018-0315-FLEX	018-315-CLAMP	018-315-DAMPER	018-0315-FILT-P	018-0315-HEA1/3
HIT315B	149-3SP-C	149-HCF1.7	018-0315-FLEX	018-315-CLAMP	018-315-DAMPER	018-0315-FILT-P	018-0315-HEA1/3

Product Code	Silencer 300mm Long	Silencer 600mm Long	Silencer 900mm Long	Silencer 1200mm Long	Wiring Diagram No.
HIT100	068-0100-JF1	068-0100-JF2	068-0100-JF3	068-0100-JF4	152-529
HIT125	068-0125-JF1	068-0125-JF2	068-0125-JF3	068-0125-JF4	152-529
HIT150	068-0150-JF1	068-0150-JF2	068-0150-JF3	068-0150-JF4	152-529
HIT160	068-0160-JF1	068-0160-JF2	068-0160-JF3	068-0160-JF4	152-529
HIT200	068-0200-JF1	068-0200-JF2	068-0200-JF3	068-0200-JF4	152-529
HIT250	068-0250-JF1	068-0250-JF2	068-0250-JF3	068-0250-JF4	152-529
HIT250B	068-0250-JF1	068-0250-JF2	068-0250-JF3	068-0250-JF4	152-529
HIT315	068-0315-JF1	068-0315-JF2	068-0315-JF3	068-0315-JF4	152-529
HIT315B	068-0315-JF1	068-0315-JF2	068-0315-JF3	068-0315-JF4	152-529

Optimum Energy Efficiency Point

SINGLE Phase - 220V to 240V / 50Hz


Product Code	Volume m³/s	Pressure Pa	Input kW	Speed r/min	Efficiency %	FMEG
HIT100	-	-	-	-	-	-
HIT125	-	-	-	-	-	-
HIT150	-	-	-	-	-	-
HIT160	-	-	-	-	-	-
HIT200	0.154	288	0.158	2520	28.1	N46
HIT250	0.140	313	0.178	2400	24.7	N43
HIT250B	0.127	332	0.167	2390	25.2	N43
HIT315	0.145	275	0.179	2270	22.2	N40
HIT315B	0.317	257	0.275	2230	29.5	N45

Data provided at standard air density of 1.2 kg/m³.
Values are per ISO 12759 installation category D (total).

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.

Jetflow HIT

Dimensional Data

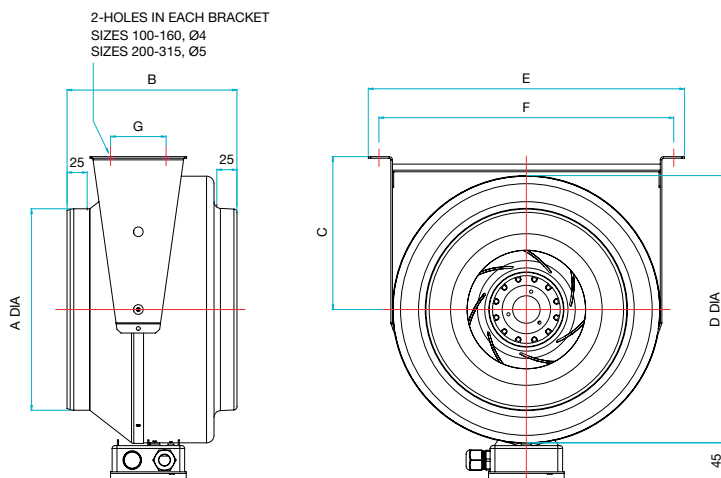

Product Code	A	B	C	D	E	F	G	Weight kg
HIT100	98	204	130	236	284	270	47	3.7
HIT125	123	193	130	236	284	270	47	3.7
HIT150	148	195	165	278	326	312	47	3.6
HIT160	158	195	165	278	326	312	47	3.6
HIT200	198	235	190	333	392	372	100	5.5
HIT250 & HIT250B	248	210	190	333	392	372	100	5.3
HIT315 & HIT 315B	313	265	227	400	460	440	100	8.8

All dimensions are expressed in mm.

Elta Fans Limited has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.



BUILDING SERVICES

Tel: +44 (0) 1384 275800
Fax: +44 (0) 1384 275810
e-mail: bs@eltofans.co.uk

46 Third Avenue
Pensnett Trading Estate
Kingswinford, West Midlands
DY6 7US, United Kingdom

APPLIED TECHNOLOGY

Tel: +44 (0) 1489 566500
Fax: +44 (0) 1489 566555
e-mail: at@eltofans.co.uk

17 Barnes Wallis Road
Segnesworth East Industrial Estate
Fareham, Hampshire
PO15 5ST, United Kingdom

EXPORT

Tel: +44 (0) 1489 566500
Fax: +44 (0) 1489 566555
e-mail: export@eltofans.co.uk

17 Barnes Wallis Road
Segnesworth East Industrial Estate
Fareham, Hampshire
PO15 5ST, United Kingdom

www.eltofans.com



BS EN ISO 9001:2008
FM 556465



A member of
HEVAC ASSOCIATION



PATRONS

A member of

ELTA
GROUP LIMITED